




# BlackBerry Curve 8900 Microphone Replacement

If you have a broken Microphone in your Blackberry, you can replace it using this guide.

Written By: Johnny Tran

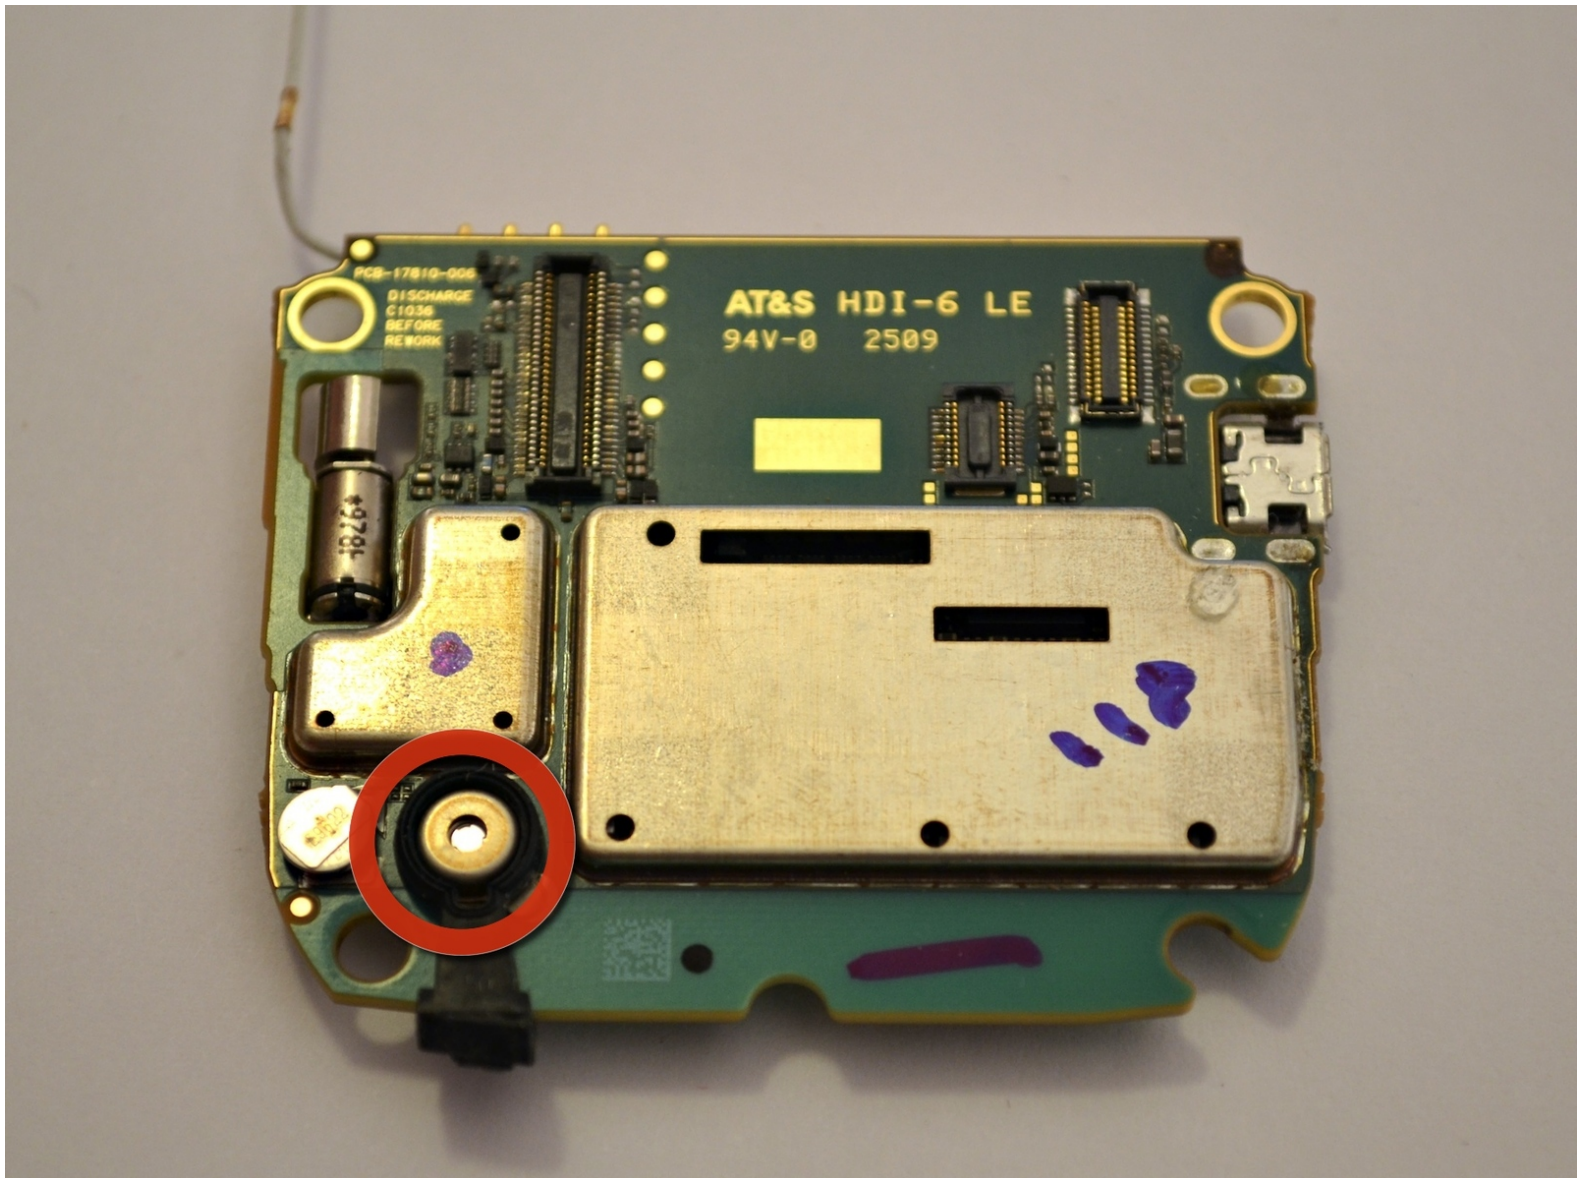



## TOOLS:

- [iFixit Opening Tools](#) (1)
- [T6 Torx Screwdriver](#) (1)



## PARTS:

- [Replacement Blackberry curve microphone](#) (1)

## Step 1 — Microphone



- Remove battery cover and battery on the back of the device.

## Step 2



- Using a small plastic opening tool, remove the lower rear cover.



## Step 3




- Remove six screws from the midframe of the device.

## Step 4





- Remove the midframe from the phone.

## Step 5

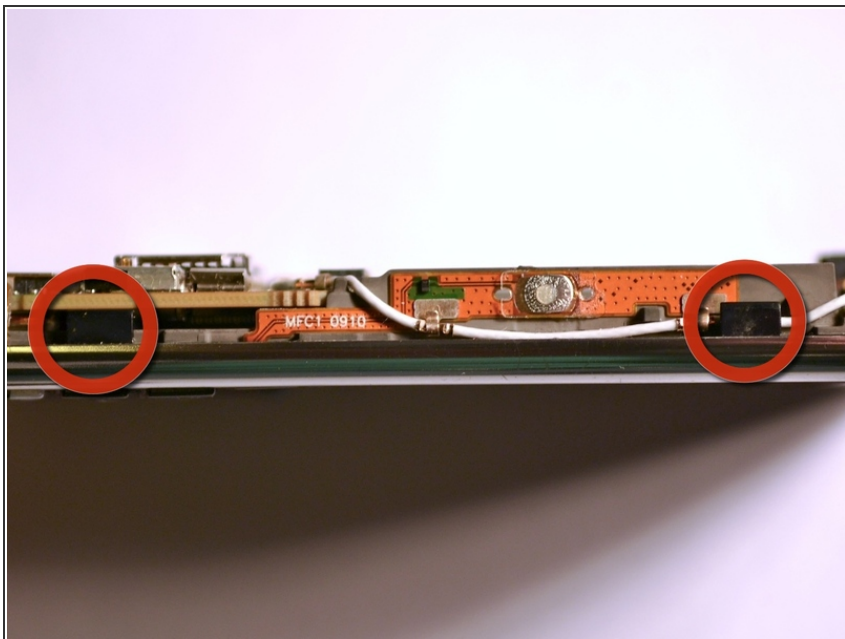

- Gently pry the back the plastic tabs that secure the motherboard to the case.
- Slowly work your way around the case until the tabs until the motherboard comes free.



## Step 6

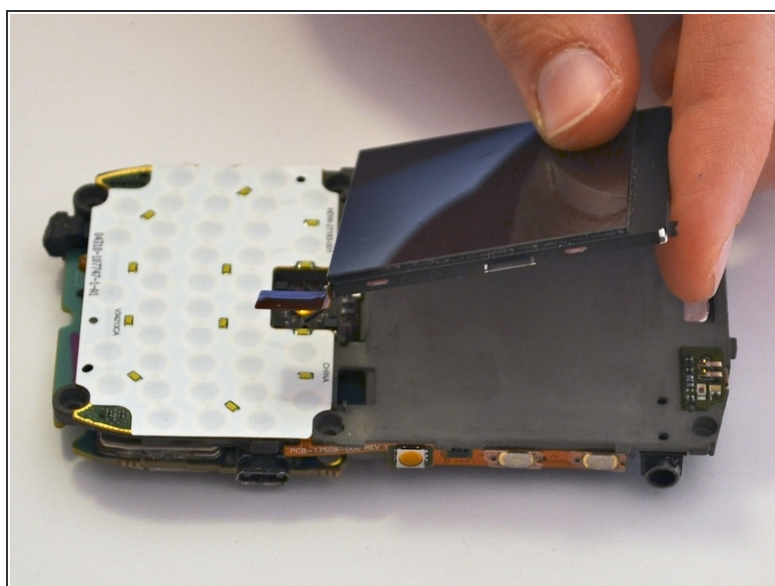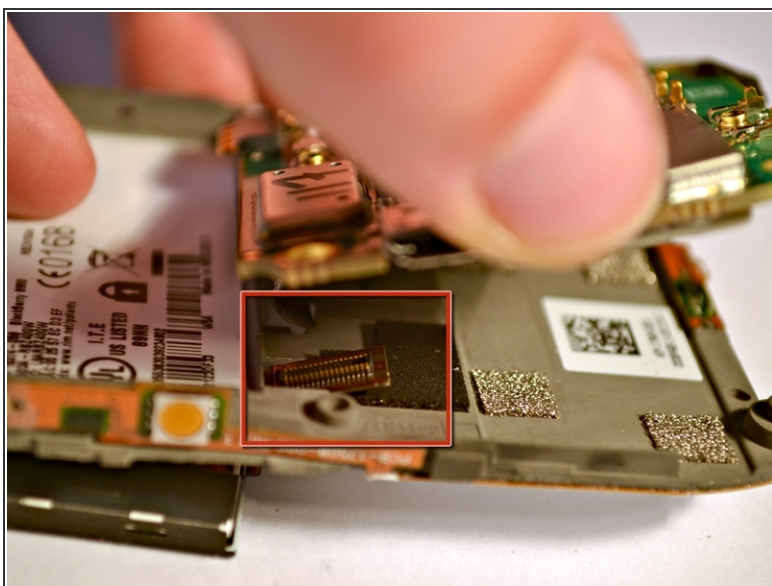

- Remove the screen so as not to damage it.




## Step 7

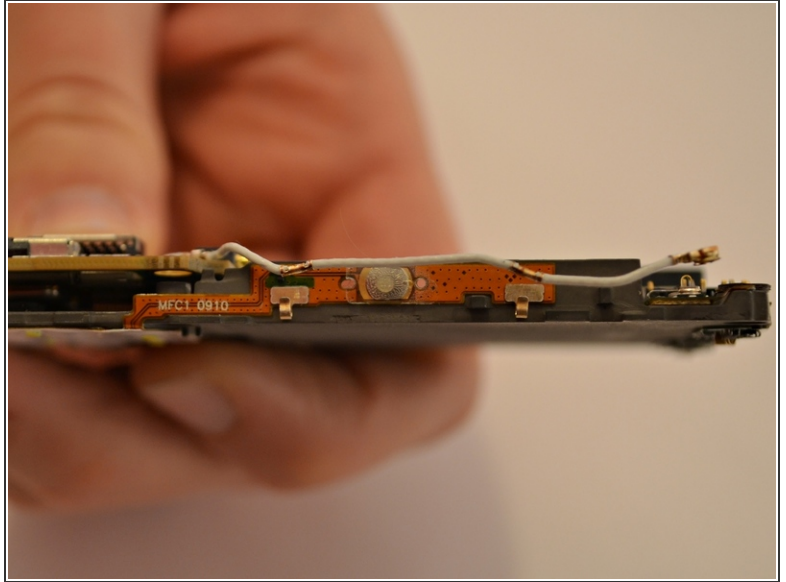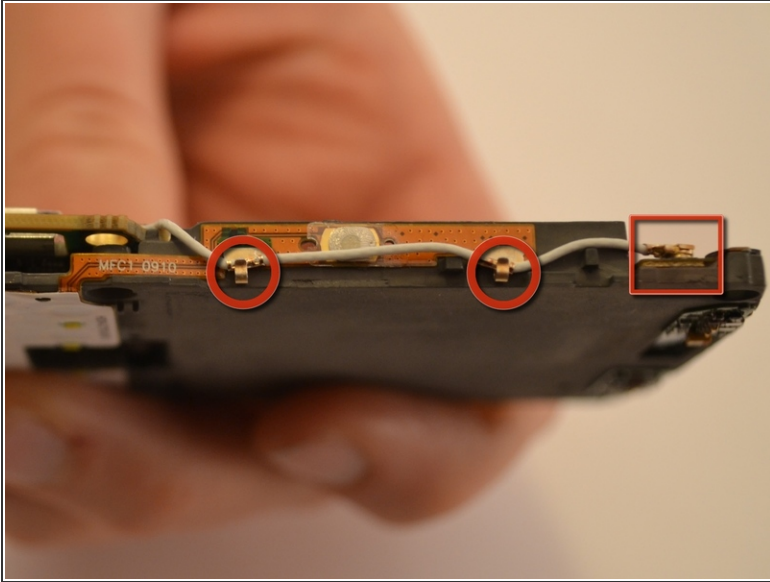


- Carefully unhook the antenna cable in all three locations.

## Step 8

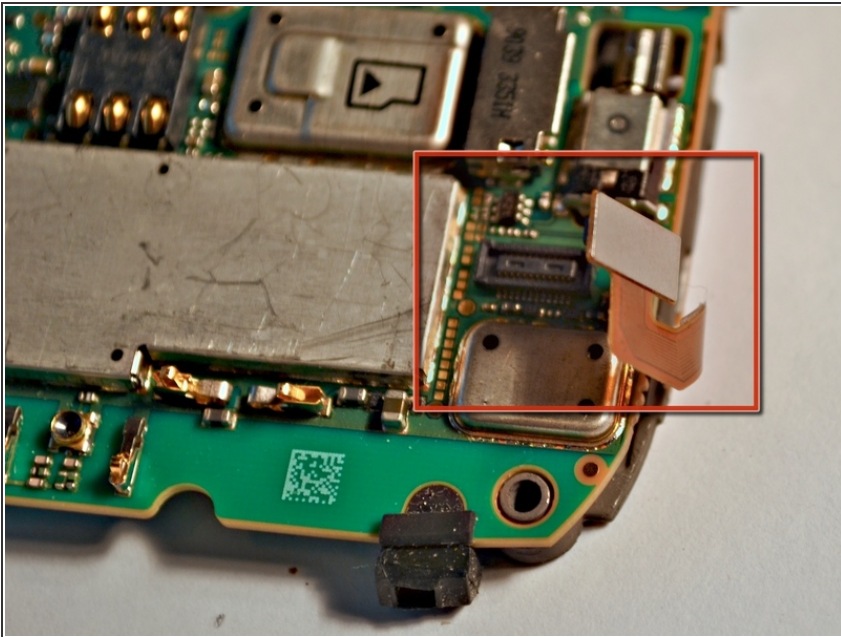



- Detach the ribbon cable on the front of the motherboard.

## Step 9

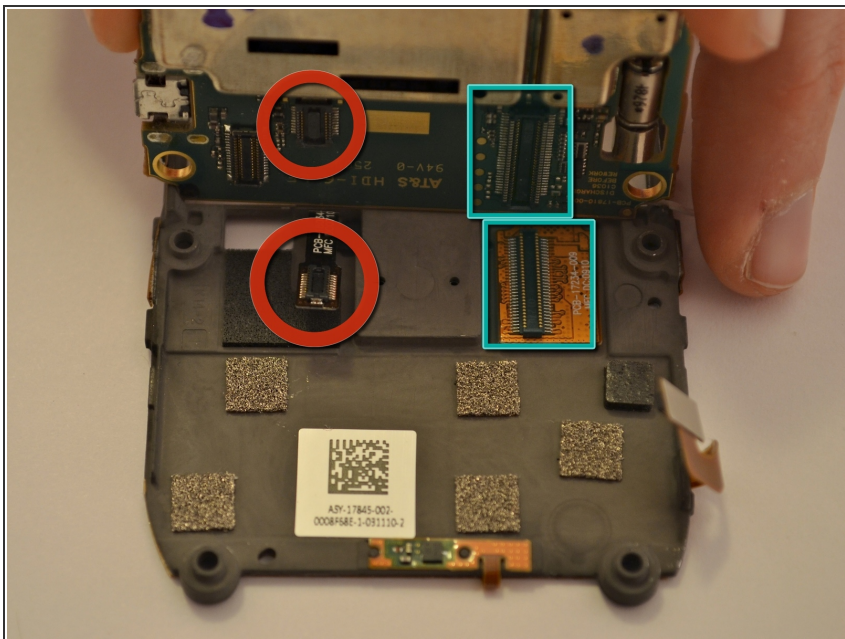

- Tilt the motherboard up and detach both ribbon connections.

## Step 10

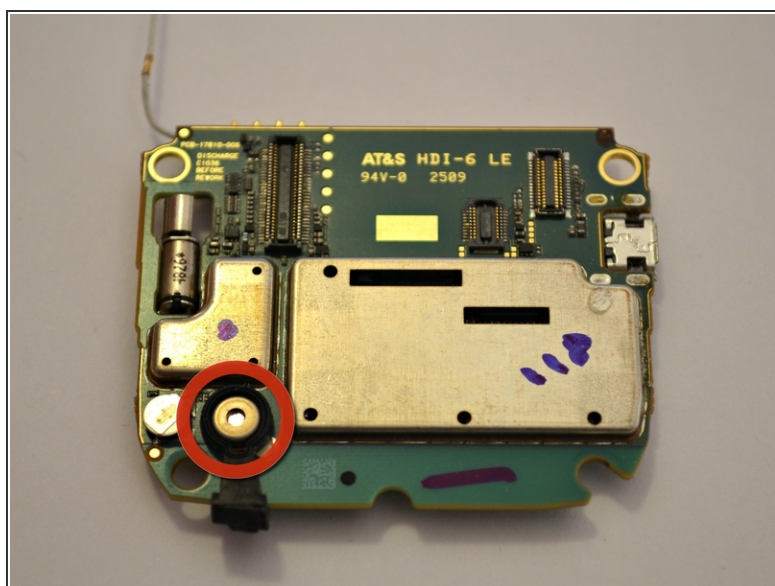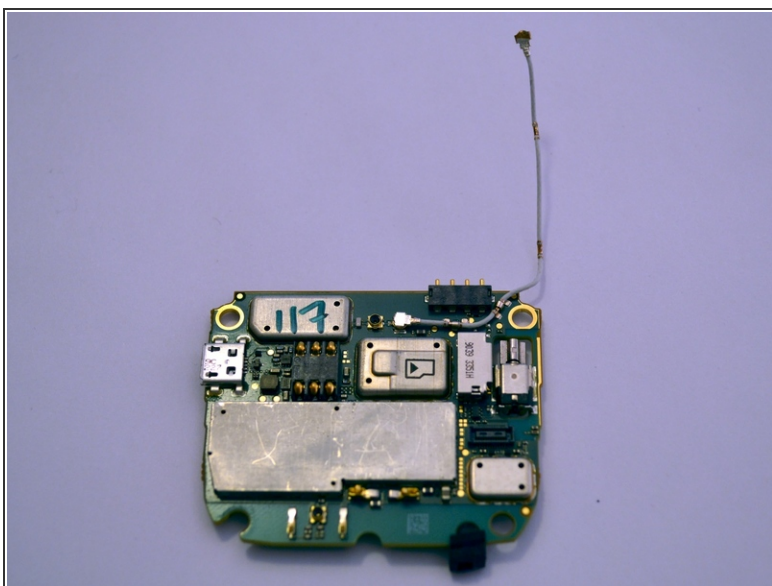

- Replace the entire motherboard to replace the microphone (circled in red).

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-19 12:11:04 AM.

